

Performance Facts™


Loudspeaker Specifications

Grimani System Rixos-M



Sound Level Capability - Long Term -

1m	108 dB
At seat of 3000/6000/9000ft ³ Room	101dB / 98dB / 95dB



Sound Level Capability - Short Term - Bursts

1m Anechoic	115 dB
In 3000/6000/9000ft ³ Room	108dB / 105dB / 102dB
Recommended max room volumes (Fronts)	6000 ft3

Product Overview

The Rixos loudspeaker is a 2-way system with waveguide-coupled tweeter. It has dual 6.5" Woofers and 1" High-efficiency tweeter. It is designed for surface and in-wall installations, and features top quality european componentry.




Performance Specifications

Frequency Range (-3dB)	80Hz - 18kHz	See Page 2
Frequency Range (-6dB)	70Hz - 18kHz	
Frequency Range at High SPL (-3dB) - 95dB	80Hz - 18kHz	
Frequency Range at High SPL (-3dB) - 105dB	95Hz - 18kHz	


Frequency Response - (Spinorama)		See Page 2
Axial	+/- 2dB	
Listening Window	+/- 2dB	
Reflection Window	+/- 3dB	
Sound Power	+/- 3dB	

Directivity Index 125/250/500/1k/2k/4k/8k/16kHz	0 / 3 / 5 / 7 / 6 / 6 / 8 / 7dB	See Page 2
Directivity Index in Crossover Regions	7 dB	See Page 2
Coverage 500~10kHz -3dB	100H / 50V	See Page 2
Coverage 500~10kHz -6dB	140H / 80V	See Page 2
Main Listening Axis (H and V)	20	-10

Sensitivity	2.8V/1m Anechoic	95 dB
Sensitivity	3000/6000/9000ft3	88dB/85dB/82dB



Power Handling Long Term	200 W
Power Handling Short Term	300 W
Power Handling At Max SPL condition	300 W



Input Voltage Capability Long Term	2926.8 V
Input Voltage Capability Short Term	3585 V
Input Voltage Capability At Max SPL condition	3585 V

Impedance Magnitude over operating range		See Page 3
Average	4/8 Ohm	
Min	3/6 Ohm	
Max	20/50 Ohm	

Distortion	80dB-90dB-100dB- Max SPL	0.5%-0.6%-0.7%-1.5%	See Page 3
-------------------	--------------------------	---------------------	------------

Crossover Frequencies	NAHz / 1.2kHz
------------------------------	---------------

Crossover Lobe Aiming	0H/-10V
------------------------------	---------

Crossover Null Aiming	0H/+45V
------------------------------	---------






Dimensions	Height / Width / Depth	36 / 13 / 4 Inches
-------------------	------------------------	--------------------

Weight	24 Pounds
---------------	-----------

Wire Length Max	12-14-16-18 ga	100-50-25-12 ft
------------------------	----------------	-----------------

Polarity (Woof-Mid-Tweet)	+ / NA / +
----------------------------------	------------

Connector Type	Barrier Strip
-----------------------	---------------

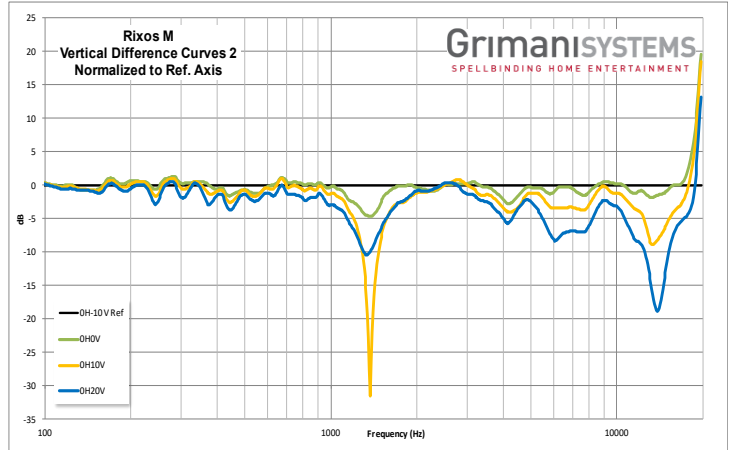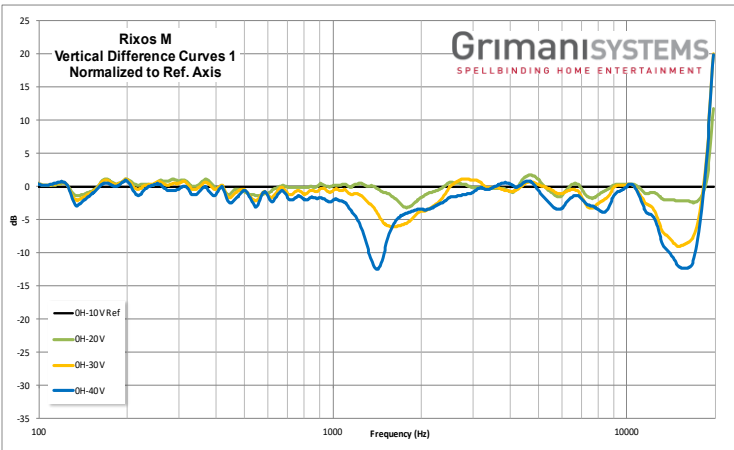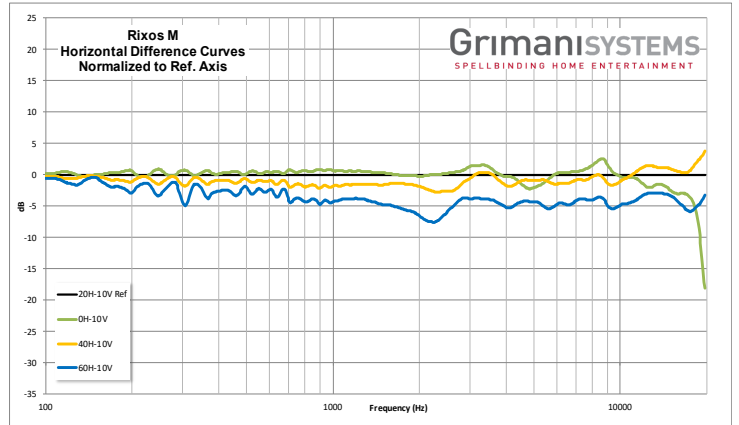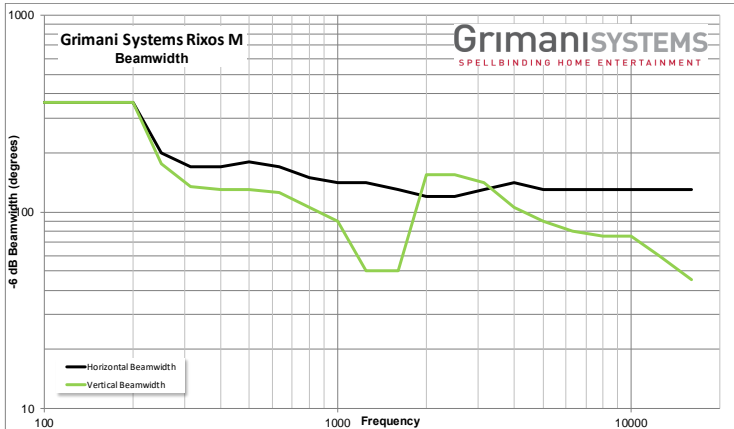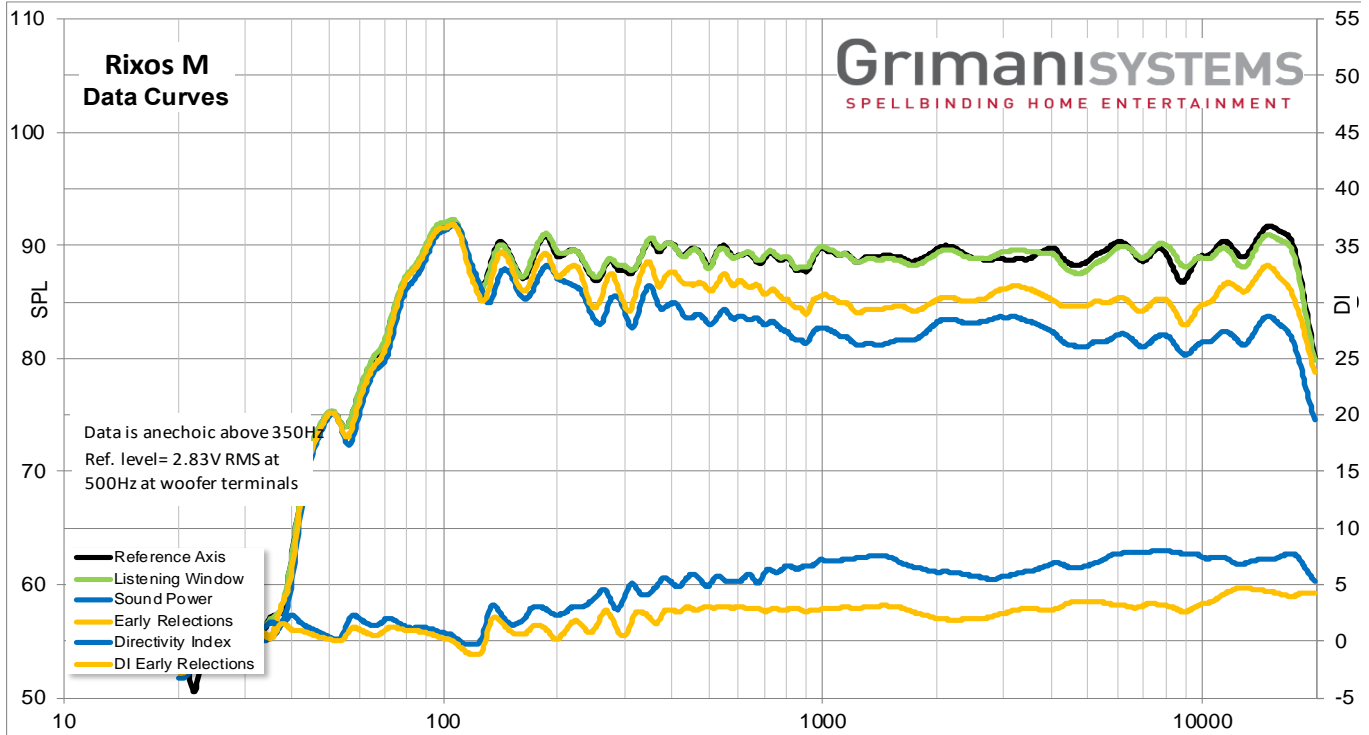

All specifications herein are provided by the manufacturer for the purpose of accuracy in sound system and room design. The Manufacturer reserves the right to changes without prior notice. © 2021 Grimani Systems LLC.