


## 3.5-way Active Quad-Amplified DSP Shallow Speaker




- Flush or Surface Mount
- Exceptional Dynamics and Finesse
- Active -Amplified / Integrated Digital Signal Processing / Room EQ
- Calibration, Diagnostics, and 24/7 monitoring Over IP
- 8" deep
- Basic Specifications:  
12" woofer / 6.5" Mids / 1" annular driver in CSA™ waveguide / 118-123 dB 1m Long-Short SPL  
Rooms up to 1000ft<sup>2</sup> / 80Hz to 20kHz / 1200W rack amplifier / DSP x-over and room EQ  
36"x14"x8"

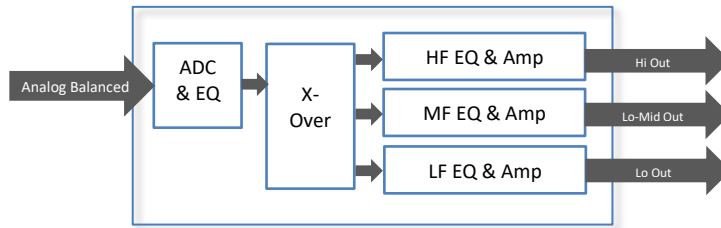

**EQ/Amp/Spkr Block Diagram**



**Rixos-XL**

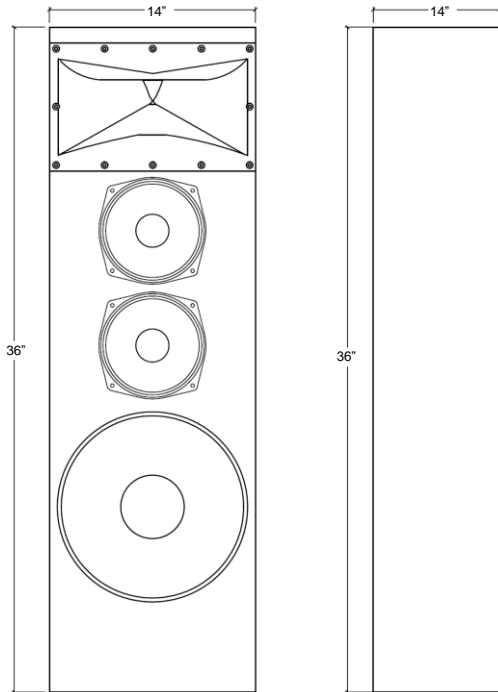


**4 Channel DSP Power Amp**

**Mounting Kit Options:**

On-wall – Concealed by screen or stretched fabric: Three shock-mount L Brackets

On-wall – Visible: Fabric shroud with painted end caps & mounting cleats.

In-wall - Visible: Perimeter bracket & fabric-covered grille frame.

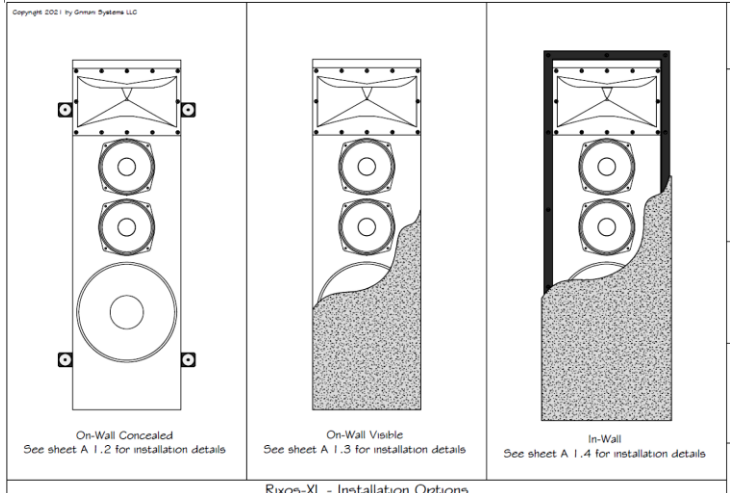

**Responses: Axial, Listening Window, Reflections, and Sound Power**

