



Rixos-S

- Active Bi-Amplified DSP 2-Way Cinema Speaker
- Ultra-wide dispersion for a larger listening sweet-spot and enhanced immersion
- High sound pressure levels in a compact package
- Shallow form factor
- Exceptional Dynamics and Finesse
- Patented Novel 21st Century technology
- Integration-friendly



112dB Sound Pressure Level
Appropriate for 300 Sqft Rooms



Digital Signal Processing EQ



Calibration, Diagnostics and
24/7 Monitoring Over IP

GrimaniSYSTEMS
IMMERSIVE SOUND POWER



Grimani.tv




Grimani Systems



+1 (415) 883 1476



Novato, CA 94949 USA




EQ/Amp/Spkr Block Diagram

Rixos-S

1" Dome Tweeter
in CSA Waveguide

6.5" Woofers

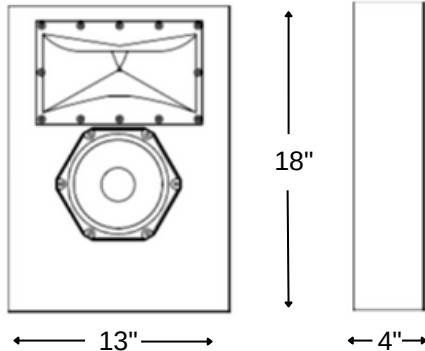


2~4 Channel DSP Power Amp
2 channels per speaker

Mounting Kit Options

On-wall + Concealed by screen or stretched fabric: Three shock-mount brackets.

On-wall, Visible: Mounting cleats & fabric-covered grille.

In-wall, Visible: Perimeter flanges & fabric-covered grille.

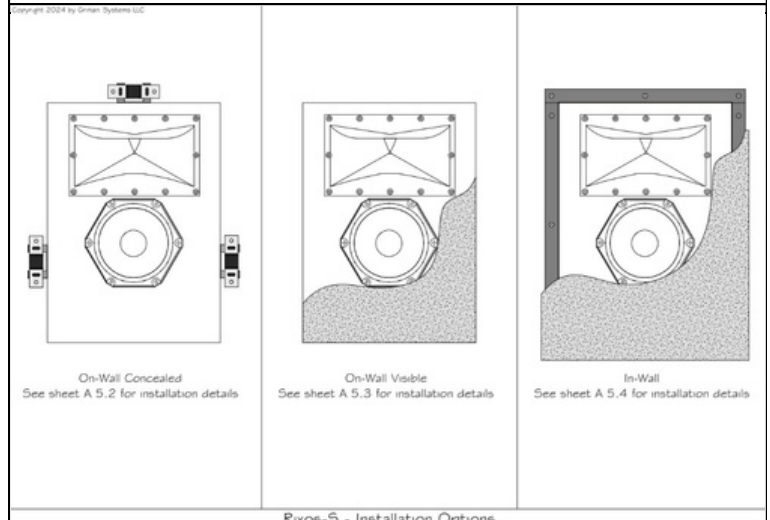

Responses: Listening Window and Sound Power

